



# AcBel Product Specification

Acbel Part No.	<b>See Ordering Information (Page 16)</b>
Model Name	<b>EV Series</b>
Description	<b>1/8<sup>th</sup> Brick DC-DC Converters 24Vdc and 48Vdc 3.3Vdc, 5Vdc and 12Vdc Output 75W Output Power Negative Logic</b>
Revision	<b>I</b>
Date Issued	<b>10/06/2010</b>

## EV Series

### Open Frame Eighth Brick DC-DC Converters



#### DESCRIPTION:

The Open Frame EV Series modules are high density DC-DC converters designed for use in distributed power architectures, workstations, EDP equipment and telecommunications. The EV Series modules may be used as fit and function replacements for industry standard Quarter Brick with 34% space savings. Using Planar Magnetics and Synchronous Rectification produce up to 75W in a 1/8<sup>th</sup> Brick Package

#### FEATURES:

- Size: 58.9mm x 22.8mm x 9.5mm
- Constant Frequency
- High Efficiency: 92% (typical – 12Vout)
- Low Output Noise
- Input Voltage Range:
  - 36 to 75 Vdc (EV48 models)
  - 18 to 36 Vdc (EV24 models)
- Output Over Voltage Protection
- Current Limit/Short Circuit Protection
- 80% to 110% Output Trim
- No sink current from output during shutdown
- Logic ON/OFF
- MTBF = 1.3 Mhrs
- RoHS Compliant
- CSA Certified to IEC 60950-1 for Basic Insulation

#### OPTIONS:

- Choice of Logic ON/OFF Configuration

#### **EV48 models (48Vin)**

EV48-3.3-100 (3.3Vout/20A)

EV48-5.0-75 (5.0Vout/15A)

EV48-12-75 (12Vout/6.25A)

#### **EV24 models (24Vin)**

EV24-3.3-100 (3.3Vout/20A)

EV24-5.0-75 (5.0Vout/15A)

EV24-12-75 (12Vout/6.25A)



### ABSOLUTE MAXIMUM RATINGS:

Exceeding absolute maximum ratings may cause permanent damage and may reduce reliability.

PARAMETER	MIN	MAX	UNITS	CONDITIONS
Input Voltage EV48 models EV24 models	36 18	75 36	Vdc	Continuous
Transient Input voltage EV48 models EV24 models		100 50	Vdc	100 msec max.
Operating Temperature	-40	85	°C	Subject to power de-rating
Storage Temperature (Ambient)		125	°C	
Wave Soldering temperature, for 10 seconds.		260	°C	

### INPUT SPECIFICATIONS:

Ta=25°C, airflow rate = 400LFM, Vin = Vin,nom unless noted otherwise ; Full ambient operating temperature range is -40 °C to 85 °C with power derating

PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
Operation Input Voltage ( $V_i$ ) EV48 models EV24 models	Vin,min 36 18	Vin,nom 48 24	Vin,max 75 36	Vdc	After start up condition
Maximum Input Current ( $I_{i,max}$ ) EV48-3.3-100 EV48-5.0-75 EV48-12-75 EV24-3.3-100 EV24-5.0-75 EV24-12-75			2.5 2.9 2.9 4.9 5.5 5.5	A	Vin = 0 to Vin,max
Input Reflected-Ripple Current, Peak to Peak		20		mAp-p	Measured before input filter, 12uH inductor
Input Transient			1	A <sup>2</sup> t	
Startup Input Voltage EV48 models EV24 models	33 17		36 19	V	
Shutoff Input Voltage EV48 models EV24 models	30 16		33 18	V	
Hystersis	1			V	



**OUTPUT SPECIFICATIONS:**

Ta=25°C, airflow rate = 400LFM, Vin = Vin,nom unless noted otherwise ; Full ambient operating temperature range is -40 °C to 85 °C with power derating

PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
Output Voltage Set-point	V <sub>nom</sub> - 1.5%	V <sub>nom</sub>	V <sub>nom</sub> + 1.5%	V	Vin = Vin <sub>nom</sub> , Io=Io <sub>max</sub>
Line Regulation			1	% V <sub>nom</sub>	Vin = Vin <sub>min</sub> to Vin <sub>max</sub> Io=Io <sub>max</sub>
Load Regulation			1	% V <sub>nom</sub>	Vin = Vin <sub>nom</sub> Io=0A to Io <sub>max</sub> ,
Temperature Regulation			1	% V <sub>nom</sub>	Vin = Vin <sub>nom</sub> Io=Io <sub>max</sub> Ta=-40°C to 70°C
Total Output Voltage Range	V <sub>nom</sub> - 3%		V <sub>nom</sub> + 3%	V	Over sample load, line and temperature
Output Ripple and Noise ...See Notes		100	150	mV <sub>p-p</sub>	Peak to Peak
		30		mV <sub>rms</sub>	RMS
Output Current (Io) EV48-3.3-100 EV48-5.0-75 EV48-12-75 EV24-3.3-100 EV24-5.0-75 EV24-12-75	Io <sub>min</sub>  0		Io <sub>max</sub> 20 15 6.25 20 15 6.25	A	
Output Current Limit (rms.)	105		140	% Io <sub>max</sub>	Hiccup mode
Output Short Current (rms.)			15	Arms	Hiccup mode Rout ≤ 10mΩ
Over Voltage Protection	110		140	% V <sub>nom</sub>	Hiccup mode
Efficiency (Io) EV48-3.3-100 EV48-5.0-75 EV48-12-75 EV24-3.3-100 EV24-5.0-75 EV24-12-75	87 88 89 87 88 89	89 91 92 89 90.5 91.5		%	Io = Io <sub>max</sub>
External Load Capacitance 3.3V and 5.0V models 12Vout models	10 220		5000 1200	uF	Electrolytic Capacitor



Dynamic Response:					
Peak Deviation			4	% $V_{nom}$	25% to 50% and 50% to 75% load, $0.1A / \mu s$ ;
Settling Time			200	$\mu s$	$V_{out}$ within 1% $V_{nom}$

Notes:

1: Scope measurement should be made using a BNC connector with 1uF ceramic and 10uF aluminum electrolytic capacitor across output. Scope is set to read at 20MHz bandwidth.

2: The Cold Start condition for start up is a uniform converter temperature of  $-40^{\circ}C$  after thermal stabilization. An additional 2x 220uF is needed for 12V models cold startup conditions. Please contact Acbel for more information.

3: The Hot Start condition for start up is a uniform converter temperature of  $65^{\circ}C$  after thermal stabilization

**CONTROL SPECIFICATIONS:**

PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
Input Logic Low:					
• Voltage at 1mA current relative to -Vin			1	V	
• Current at 0 volts			1	mA	
Input Logic High					
• Enable pin voltage relative to -Vin			5.5	V	
• Leakage current			100	$\mu A$	
Turn-On Time			100	ms	$I_o = I_{o,max}$ $V_o = 90\%$ $V_{o,set}$
Output Voltage Adjustment Setpoint	80		110	% $V_{o,set}$	
Thermal Shutdown Range (Converter hotspot temperature)	105	115	125	$^{\circ}C$	Autorecover

**ISOLATION SPECIFICATIONS:**

PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
Input to Output			1500	Vdc	
Isolation Resistance	10			$M\Omega$	
Isolation Capacitance		1500		pF	

**RELIABILITY:**

PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
MTBF		1.3		MHrs	Vin=48V, Iout=80% Tamb = 25C , 400LFM

**MECHANICAL PARAMETERS:**

PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
Weight		100		g	
Size	58.4mm x 36.8mm x 12mm			mm <sup>3</sup>	

**PIN OUTS**

Pin	Function	Pin	Function
1	+Vin	4	-Vout
		5	-Sense
2	Enable (on/off)	6	Trim
		7	+Sense
3	-Vin	8	+Vout

Figure 1: EV Series Pin Outs

**OUTLINE DRAWING**

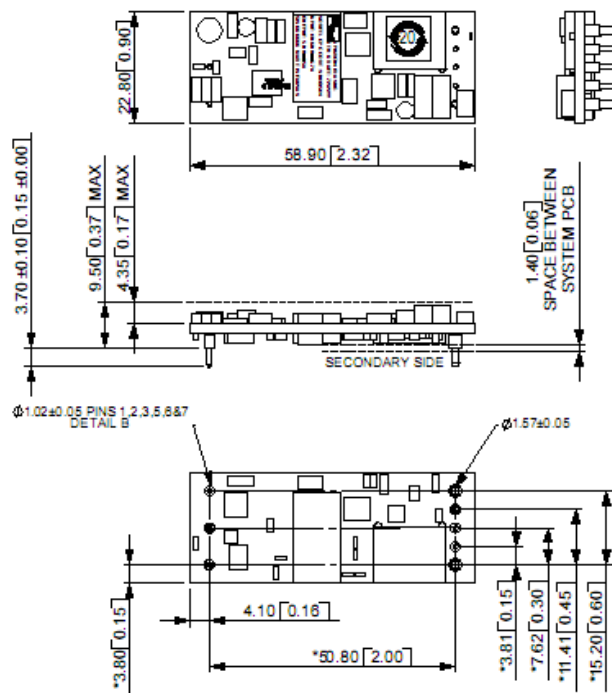


Figure 2: Mechanical Outline


## OPERATING INFORMATION

### Enable Pin

The Enable Pin (pin 2) enables the user to control when the converter will turn on or off. This pin is referenced to  $-V_{in}$  (pin 3). There are two versions available for each converter, positive logic and negative logic. For positive logic, leaving the Enable pin open or applying TTL/CMOS high voltage level turns the converter on, while pulling this pin to  $-V_{in}$  or drawing more than 1mA turns it off. The negative logic is just the inverse. An external semiconductor switch or mechanical switch can be used to implement this function.

### Remote Sense

The remote sense pins +Sense (pin 7) and -Sense (pin 5) allows the converter to correct for voltage drops across the connections from the converter output pins +/-Vout (pins 8 and 4 respectively) to the intended load. The +/- Sense pins should be connected at the point in the board where regulation is needed. Figure 3 shows the recommended connection.

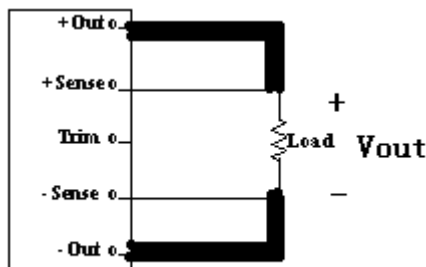


**Figure 3: Remote Sense connection**

The resistive drop across the connections should be small enough since Over Voltage Protection might be triggered during high load applications. The OVP circuit senses the +/-Vout pins.

### Trim

The Trim pin (pin 6) allows the user to adjust the output voltage across the sense pins from the initial value. Trimming the output voltage requires the user to connect a resistor between Trim and + Vout for output voltage trim up, or connect a resistor between Trim and - Vout for output voltage trim down. The functions for trim up, trim down and the circuit implementation is shown in the figure 4.

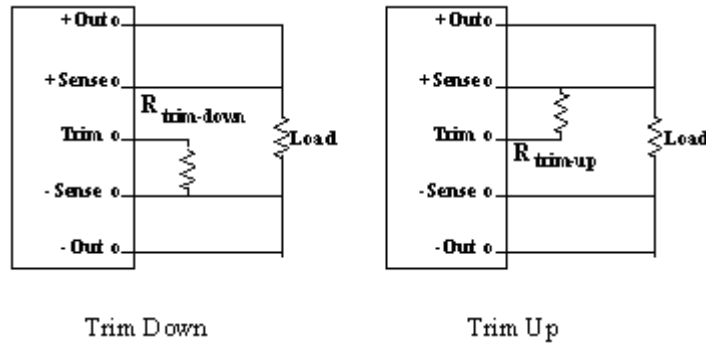

$$R_{trim-down} = \frac{511}{\Delta\%} - 10.22 \text{ kOhms}$$

$$R_{trim-up} = \frac{5.11 \times V_{nominal} \times (100 + \Delta\%)}{1.225 \Delta\%} - \frac{511}{\Delta\%} - 10.22 \text{ kOhms}$$

$$\Delta\% = \left| \frac{V_{nominal} - V_{desired}}{V_{nominal}} \right| \times 100\%$$

**Figure 4: TRIM Function**

Example: 5Vout part

Trim Up to 5.5V

$\Delta\% = 10\%$

$$R_{trim-up} = (5.11 * 5 * (100 + 10) / 1.225 * 10) - (511 / 10) - 10.22 = 168.11 \text{ kohms}$$

Trim Down to 4.5V

$\Delta\% = 10\%$

$$R_{trim-down} = (511 / 10) - 10.22 = 40.88 \text{ kohms}$$

There is an upper limit to the trim up since the OVP level is fixed. Trimming the output voltage too high may trigger the OVP circuit during higher load applications or during transients.

### Current Limit Protection

The EV series modules include over current protection that allows them to withstand prolonged overloads or short circuit conditions on the output without over heating. The EV series employs hiccup mode protection such that the output shuts down during these conditions, waits for a predetermined time (~500mS), and tries to restart. If the overload condition is still present, the converter will stop trying to increase the output voltage and repeat the cycle.





### **Over Voltage Protection**

The EV series modules have output over voltage protection. In the event of an over voltage condition in the output pins, the converter will shut down immediately. Similar to hiccup mode, it will make continuous attempts to start up until the over voltage is gone and resume normal operation automatically.

### **Input Under-Voltage Lockout**

The EV series is designed to turn off when the input voltage is too low. This is done to avoid stressing the input side circuitry of the primary circuit. The lockout circuit is a comparator with hysteresis, thus avoiding the converter jumping from on-off condition when crossing the UVLO threshold.


### **Over Temperature Protection**

The EV series modules are protected from thermal overload by an internal over temperature protection IC. When the PCB temperature sense point reaches 125degC, the converter will shut down immediately. The converter will attempt to restart when the temperature has dropped at least 10degC below the Over Temperature threshold.

### **Thermal Considerations**

The EV series are designed to operate in a wide range of thermal environments. However, enough cooling should be provided to ensure reliable performance. Heat is removed from the converter in three ways: conduction, convection and radiation.

Improved cooling by convection can be done by increasing the airflow through the module. The available load current for a given ambient air temperature is in the de-rating curves section. The test is done using the test fixture shown in figure 5.


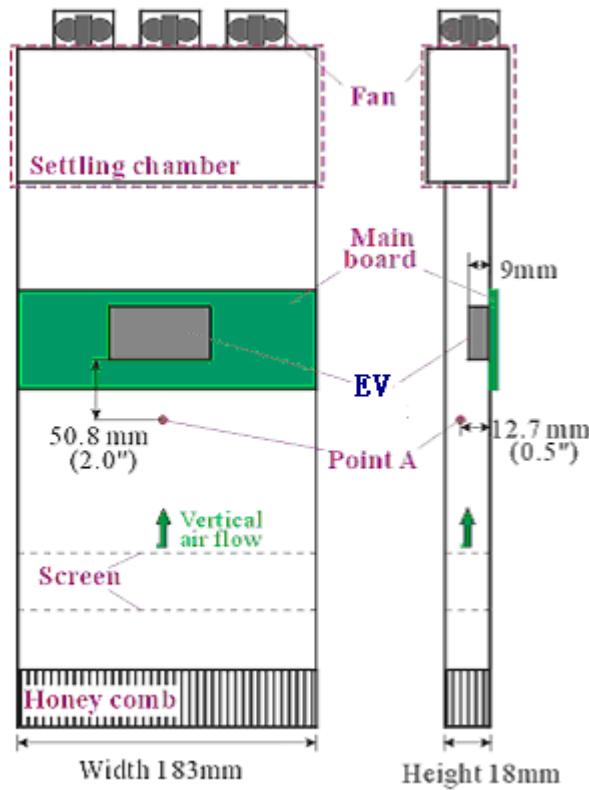




**Figure 5: Thermal Test Fixture**



Proper cooling can be verified by monitoring the temperature of the critical components of the power stage. Each of the selected critical components was monitored by using thermocouple. The generation of the thermal de-rating curves involves extensive thermal testing at different combinations of input voltage, ambient air temperature, load current and airflow with the given test fixture.

However, the final temperature of the module in the final system will depend again on several factors, including host PCB size, number of layers, and copper weight, airflow direction and turbulence, operating ambient temperatures, etc... It is highly recommended to verify the thermal performance of the converter when included in the end system.

**EFFICIENCY CURVES**

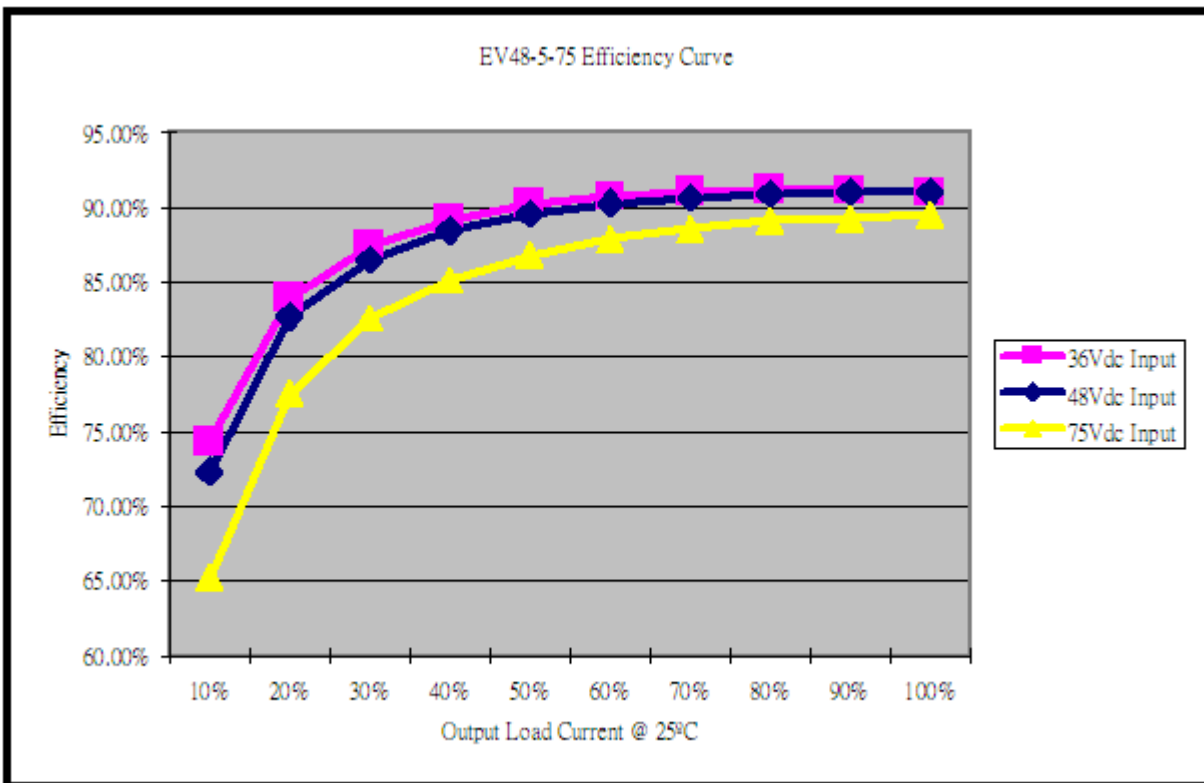
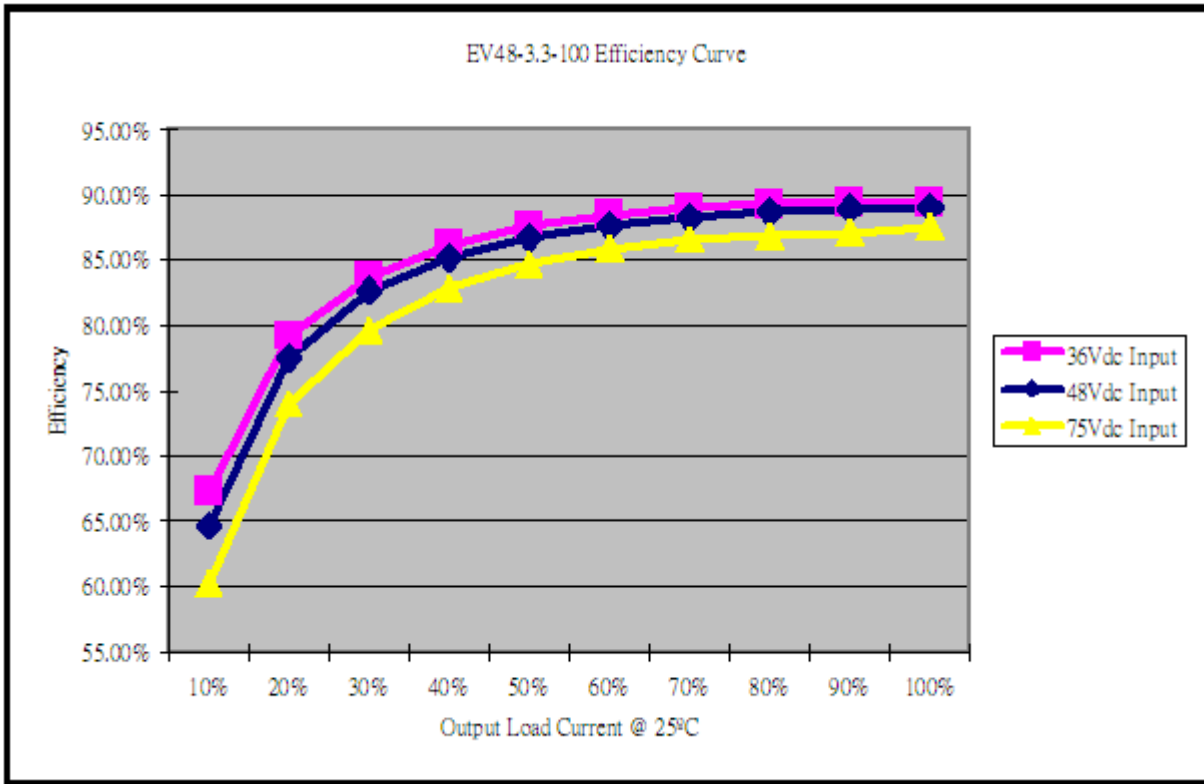


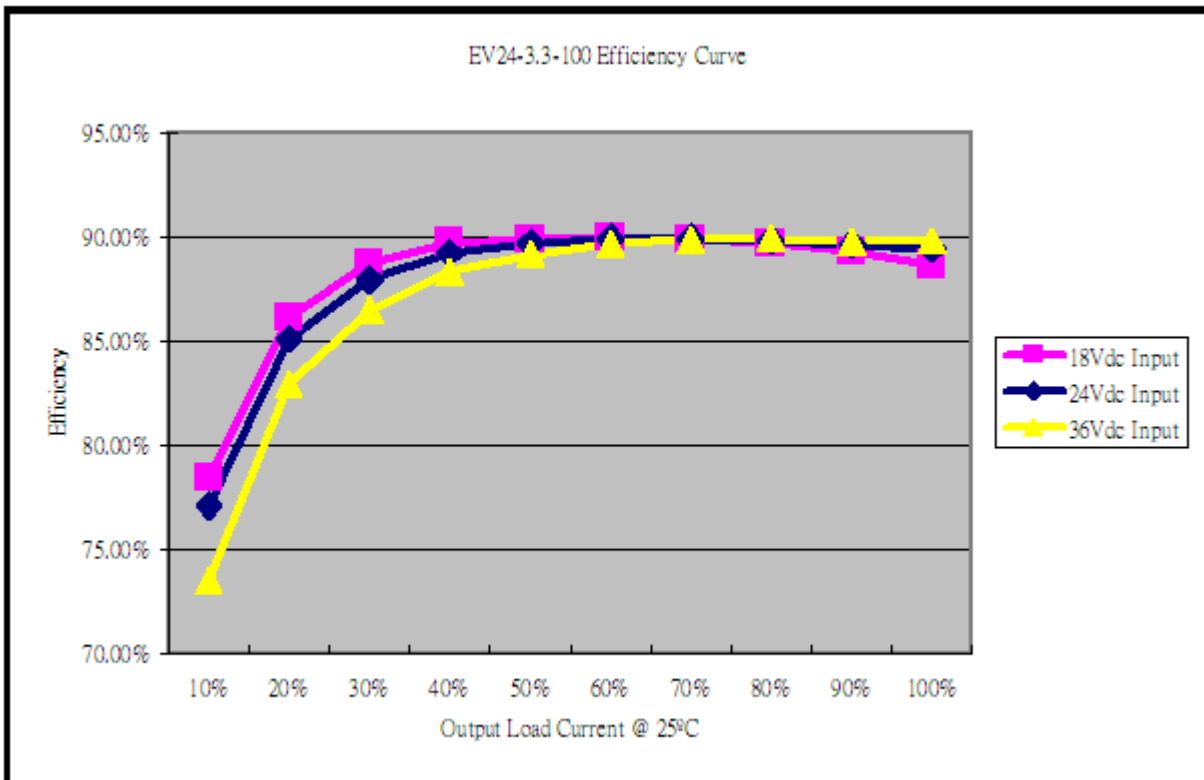
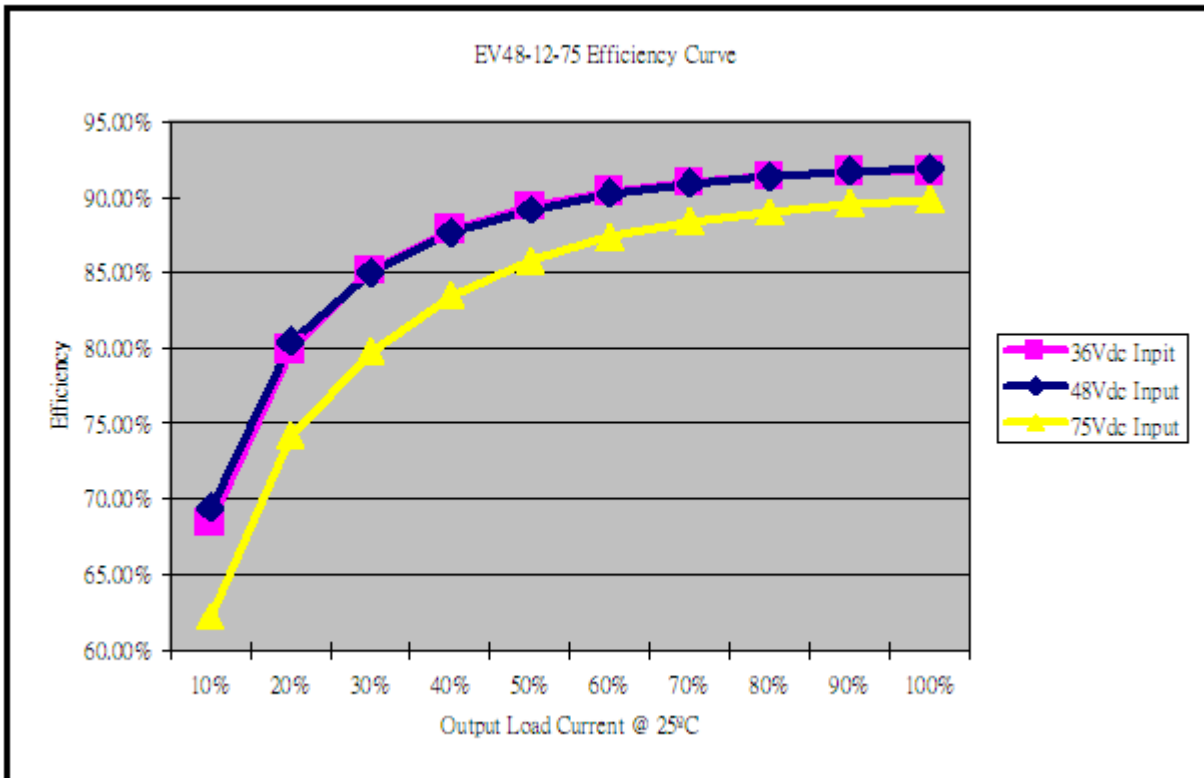


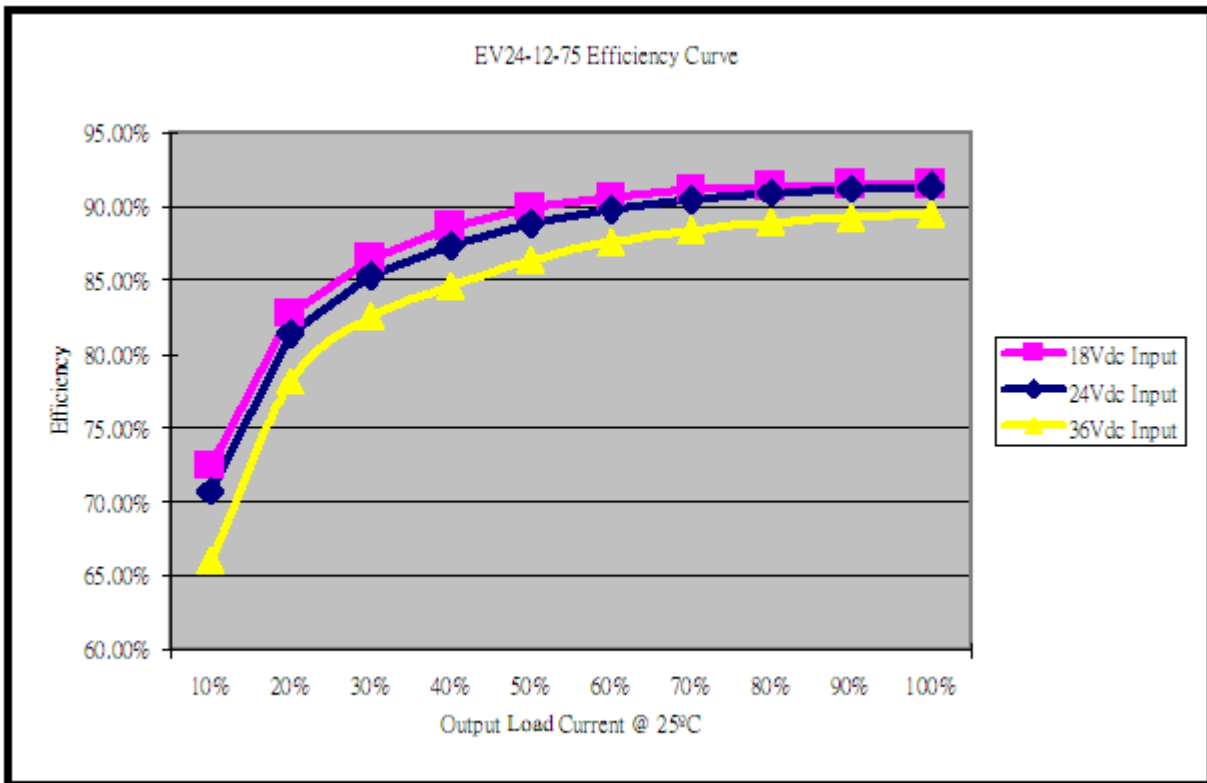
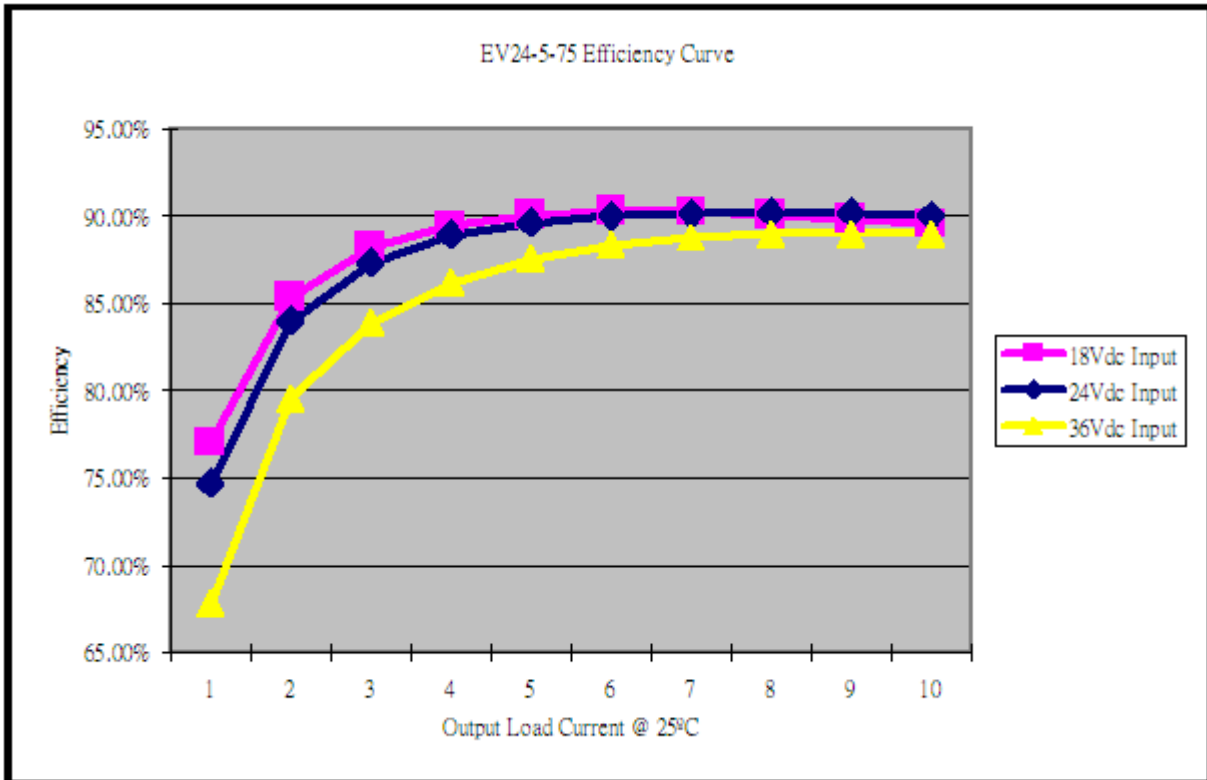


**THERMAL IMAGES**

Airflow: Pin3 to Pin1

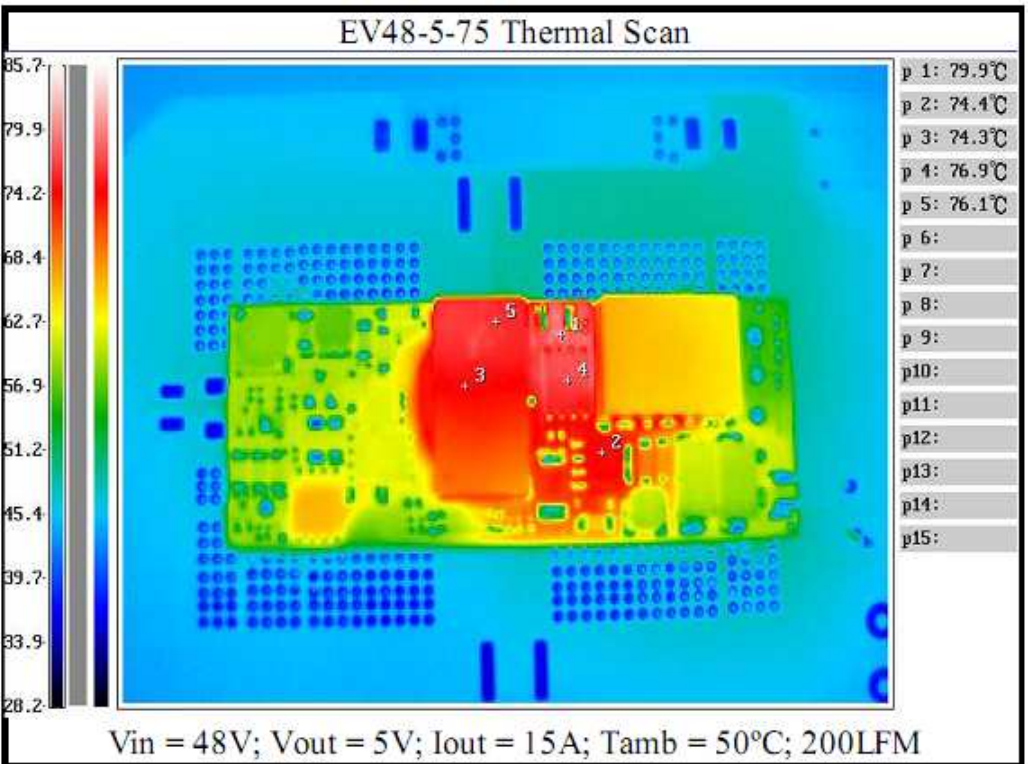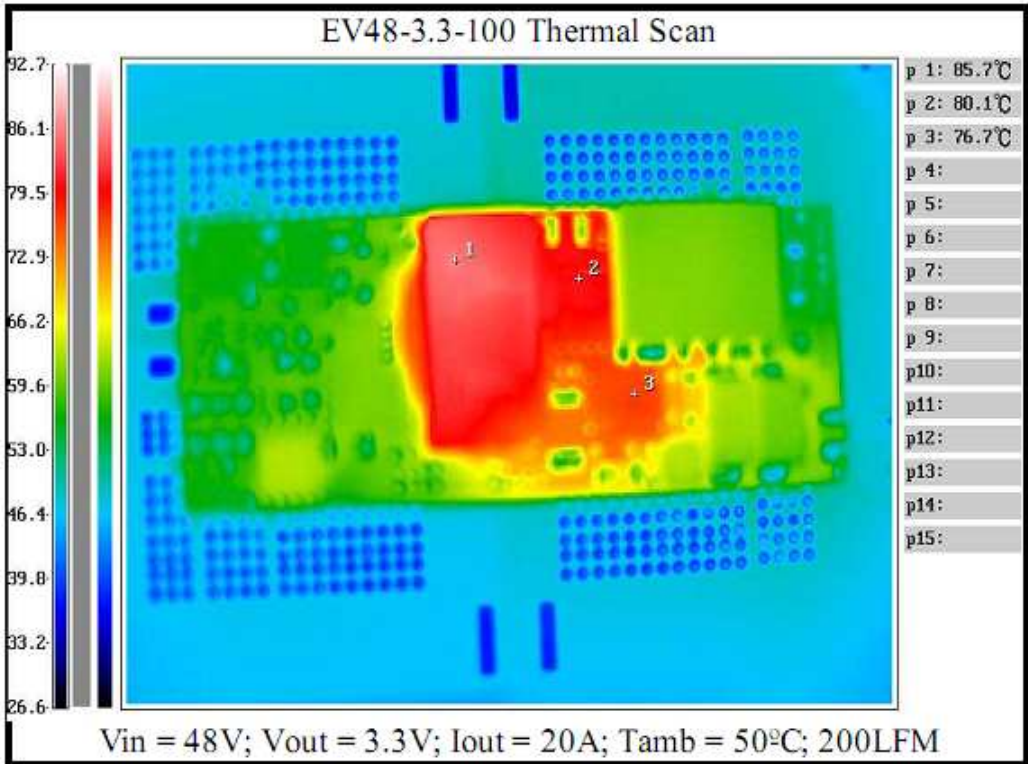

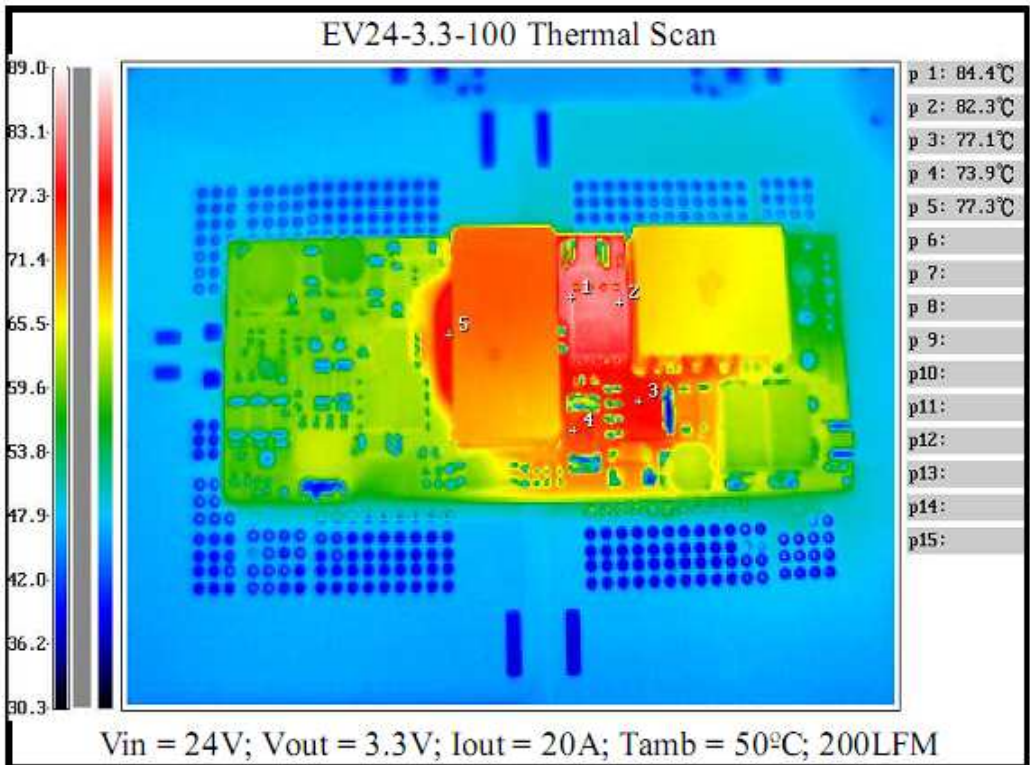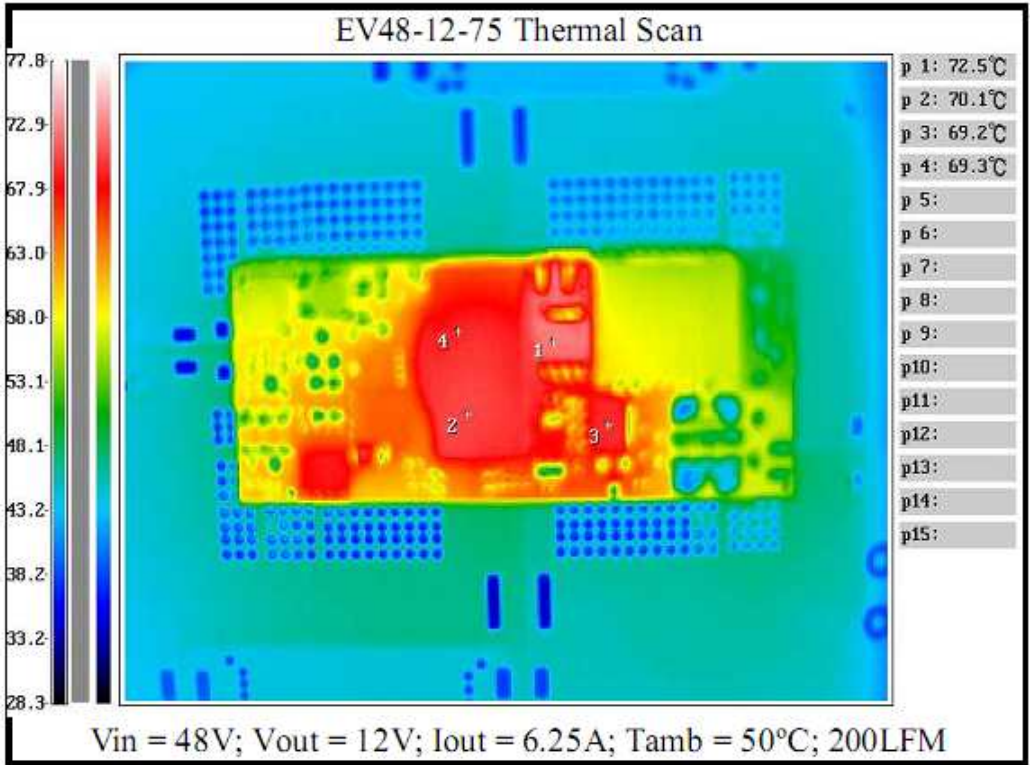

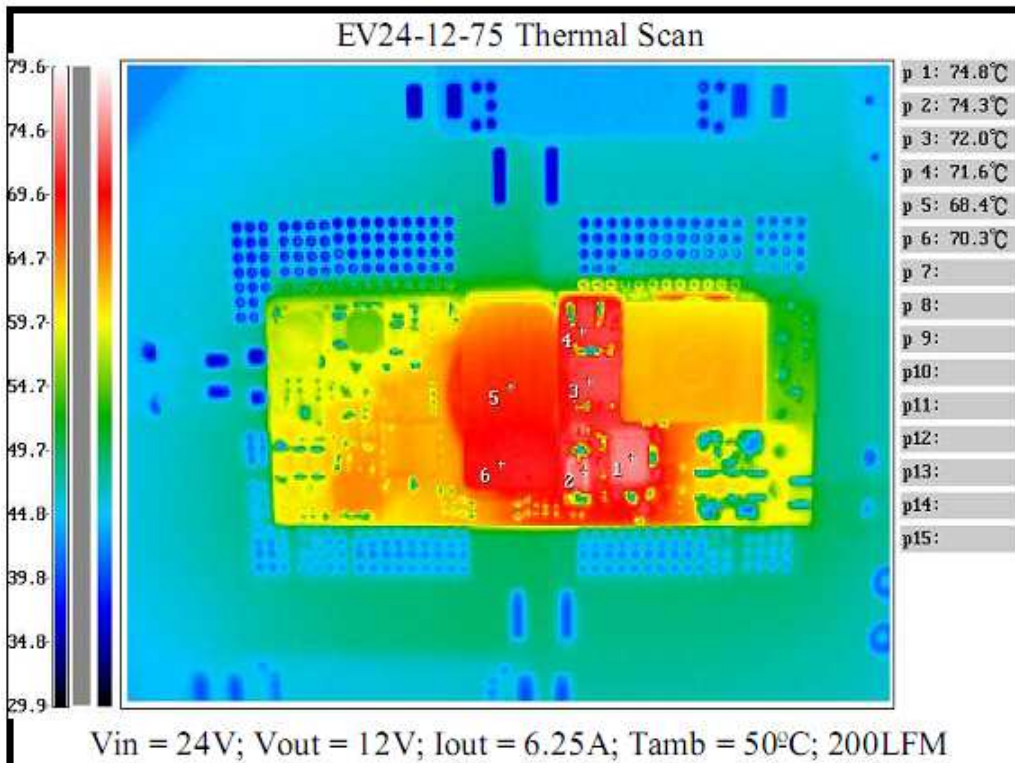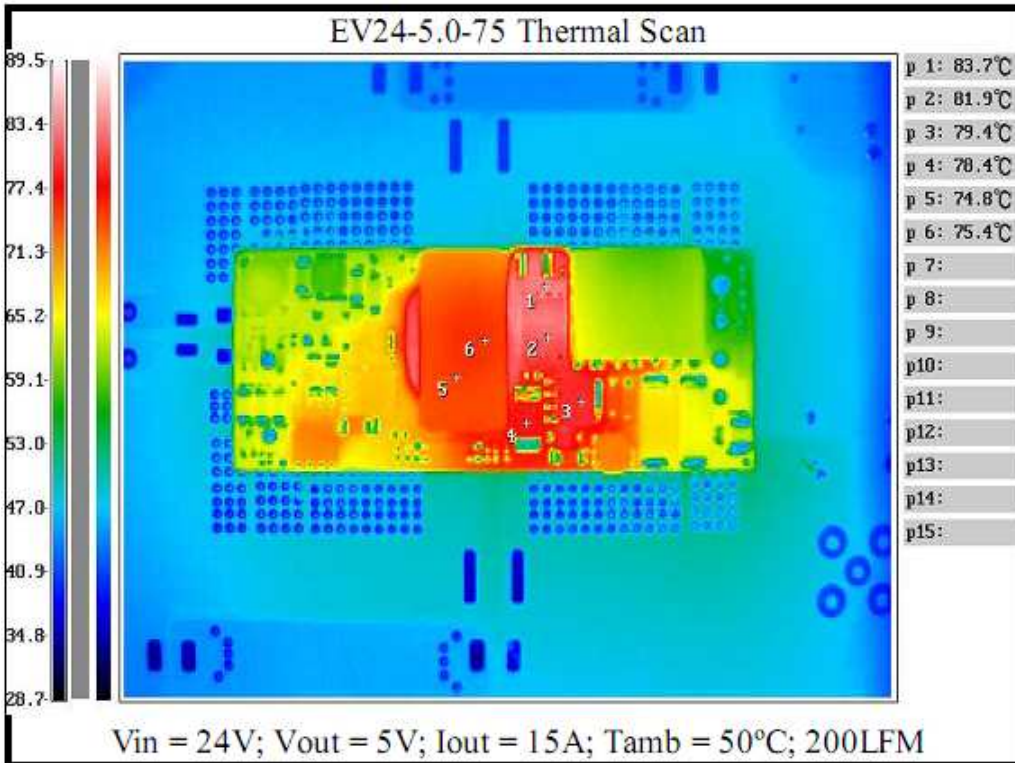





## ORDERING INFORMATION

Module Name	ACBEL P/N	RoHS	Input voltage (V)	Input current max (A)	Output voltage (V)	Output current (A)	Typ. Efficiency
EV48-3.3-100	DC7006-000G	6/6	36-75	2.5	3.3	20	89
EV48-5.0-75	DC7009-000G	6/6	36-75	2.9	5	15	91
EV48-12-75	DC8007-000G	6/6	36-75	2.9	12	6.25	92
EV24-3.3-100	DC7011-000G	6/6	18-36	4.9	3.3	20	89
EV24-5.0-75	DC7010-000G	6/6	18-36	5.5	5	15	90.5
EV24-12-75	DC8008-000G	6/6	18-36	5.5	12	6.25	91.5

Note: All Parts negative logic by default. Please contact factory for positive logic requirements.

## CONTACT INFORMATION

Please check <http://www.acbel.com/html/worldwide/worldwide.htm> for the nearest sales representative in your area.

Please visit <http://www.acbel.com/> for more information about Acbel.

---

The Acbel products listed in this datasheet are not designed, intended for use, or authorized for use as critical components in life support systems, hazardous environments or nuclear control systems.

The information and specifications contained in this datasheet are believed to be correct at time of publication. Acbel assumes no responsibility for its use, or for any infringements of patents or other rights of third parties that may result from its use. Acbel reserves the right to make changes to the product(s) or information contained in this specification without notice.